



4

Please refer to the M series hardware manual for more detailed information.

General electrical specifications					
Model	W	Rated power W			Rated voltage
HCMXB-2RS232-200-BD	0.15	0.15	DC5V	DC4.75V~DC5.25V	DC5V, voltage range DC4.75V~DC5.25V
HCMXB-2RS485-200-BD	0.125	0.125			

*

—

*

Expansion card mounting and dismounting

CN			


CN

剥线长度
Wire stripping length

线径范围
Wire width

Interface and dimension description



No.	Item		
1	Product model		
2	RS232	1	RS232 Channel 1
3	RS232	2	RS232 Channel 2
4	RS485	1	RS485 Channel 1
5	RS485	2	RS485 Channel 2

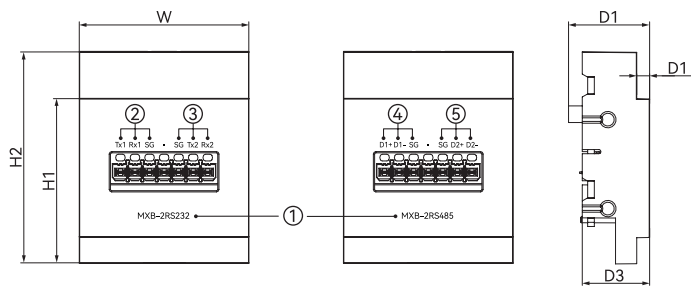

		H1	H2				
HCMXB-2RS232-200-BD	40.80	33.40	51.00	19.50	3.10	16.20	20 approx.
HCMXB-2RS485-200-BD							

Indicator description

LED Indicators						
Tx1	RS232 1 (RS232 Channel 1 data sending)	(Orange)		Not lit	No data is being sent to other devices	
				Blinking	Data is being sent to other devices	
Tx2	RS232 2 (RS232 Channel 2 data sending)	(Orange)		Not lit	No data is being sent to other devices	
				Blinking	Data is being sent to other devices	
Rx1/SG/■/SG/Rx2	-	-	-	-	-	-
D1+	RS485 1 + (RS485 Channel 1 communication signal+)	(Orange)		Not lit	No data is being sent to other devices	
				Blinking	Data is being sent to other devices	
D2+	RS485 2 + (RS485 Channel 2 communication signal-)	(Orange)		Not lit	No data is being sent to other devices	
				Blinking	Data is being sent to other devices	
D1-/SG/■/SG/D2-	-	-	-	-	-	-



Terminal and wiring description

[illegible]